

# LC20-PC60G6-6 Ceiling loudspeaker, 60W, 6

[www.boschsecurity.com](http://www.boschsecurity.com)



**BOSCH**  
Invented for life



- ▶ High output true compression driver for wide dispersion and superior coverage control out to 10 kHz
- ▶ Long throw 6.5 inch (165 mm) woofer housed in a large vented steel enclosure for extended LF performance down to 50 Hz
- ▶ 200 watt power handling provides for 113 dB maximum SPL
- ▶ Front baffle transformer tap adjustment switch
- ▶ Includes tile rails and “C” mounting ring

The LC20-PC60G6-6 speaker system from Bosch is a complete high performance two-way ceiling speaker package. The LC20-PC60G6-6 is ideal for background and foreground music, voice evacuation, paging, and sound reinforcement applications. The Premium Ceiling Speaker provides a unique combination of high acoustic output, superb coverage control, high power handling and wide dispersion, to cover virtually any size listening area. The LC20-PC60G6-6 comes completely assembled with an integrated bezel assembly, grille, rear enclosure, 6.5-inch (165 mm) coaxial two-way speaker and internal high power line-matching transformer. The speaker features a waveguide coupled true compression HF driver and a long excursion 6.5-inch (165 mm) woofer. The LC20-PC60G6-6 utilizes a transformer that offers a selection of 7.5 W (70-V only), 15, 30 or 60 watts delivered to the speaker system using either 70-V or 100-V lines, or 8 ohm bypass. Selection is via a convenient switch on the front baffle. The perforated grille is fully zinc plated and finished in semi-gloss white powder-coated enamel. The baffle and bezel are constructed from fire rated ABS. The rear enclosure is constructed from zinc-plated, heavy gauge steel. The

rear enclosure, with fiberglass damping material, provides an optimum internal volume for extended low-frequency performance. A rear cover, with provisions for a junction box fitting, provides access to a 4-pin terminal block that allows direct connection to the speaker with up to 12 gauge wire and provides pass through to additional speakers. For special voice evacuation installations a ceramic terminal block is provided and attaches to the speaker back can enclosure under the rear connector cover. Two adjustable metal tile bridges and metal “C” ring are included for safe suspension of the LC20-PC60G6-6 ceiling systems in a drop ceiling that uses mineral wool, or other fiber-based ceiling tiles.

### Certifications and approvals

Region	Certification
Europe	CE

### Parts included

Quantity	Component
2	Speaker systems
4	Tile rails
2	C-ring supports
2	Grilles
1	Installation Note
4	Support ring screws
2	Terminal connectors
1	Cutout template
2	Paint shields
2	Ceramic blocks

### Technical specifications


Frequency Range (-10 db):	50 Hz – 20 kHz
Nominal Coverage (Conical):	100°
Power Handling:	200 W Program, 100 W Pink Noise
Sensitivity (SPL 1 W/1 m):	87 dB
Max Calculated SPL:	107 dB Avg, 113 dB Peak
Impedance:	10 ohms
LF Transducer:	165 mm (6.5 in)
HF Transducer:	35 mm Compression Driver
Transformer Taps:	70V: 60W, 30W, 15W, 7.5W, 8 ohm 100V: 60W, 30W, 15W, 8 ohm
Connectors:	Removable locking 4-pin (Phoenix) 2.5 mm (12 AWG) max wire size
Enclosure:	ABS Plastic (UL94V-0) Baffle, steel back can
Grille:	Color matched steel grille with fabric
Dimensions (H x Dia):	260 mm x 280 mm (10.2 in x 11.0 in)
Cutout Size:	248 mm (9.76 in)
Net Weight:	7.0 kg (15.4 lb)

Shipping Weight: (pair)	16.83 kg (37.1 lb)
Support Hardware:	C Ring, Tile Bridge
Approvals:	UL1480, 2043; CE


### Architectural and engineering specifications:

The LC20-PC60G6-6 speaker system shall be comprised of a UL 94V-0 fire rated ABS baffle/bezel assembly, zinc plated steel rear enclosure, powder coated grille with safety tether, transformer with 8 ohm bypass, and 6.5-inch long excursion low frequency transducer with coaxially-mounted true compression HF driver. The speaker shall meet the following criteria: power rating shall be 100 watts of IEC 268-5 pink noise (6 dB crest factor). Frequency response, uniform from 50 Hz - 20 kHz. Pressure sensitivity, 87 dB SPL at 1 meter (3.3 feet) on axis with 1 watt of pink noise (ref. 20µPa). Minimum impedance, 6.5 ohms. The speaker shall be 260 mm (10.4 in) deep and 280 mm (11.0 in) in diameter. Weight shall be 7.0 kg (15.4 lb). The coaxial ceiling speaker shall be the model LC20-PC60G6-6 from Bosch.


### Frequency response and impedance:

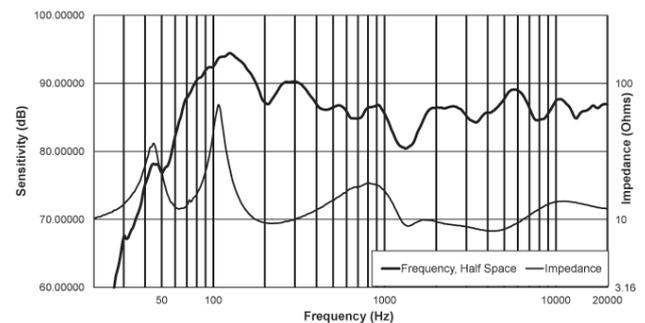


### Beamwidth:

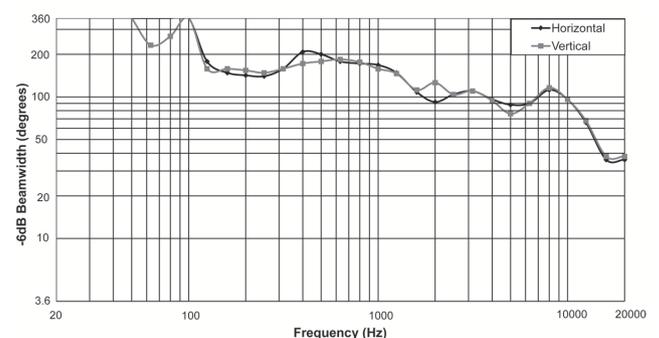

**Directivity:**

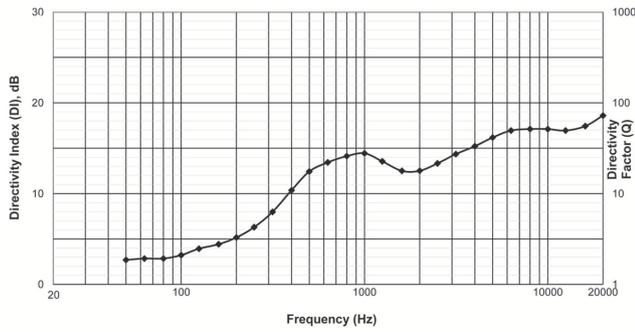

**Dimensions:**

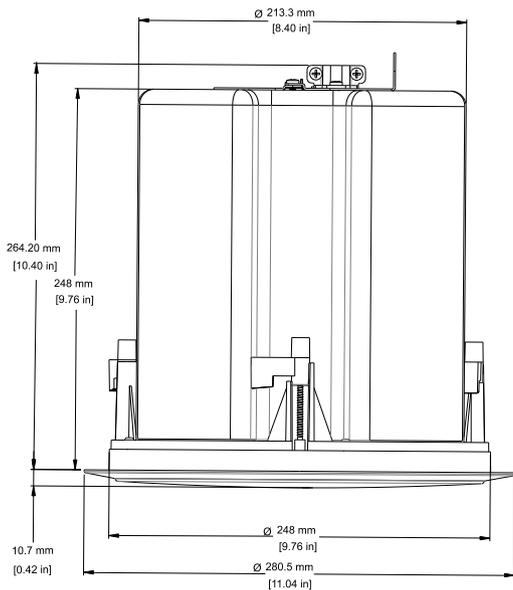

**Ordering information**

**Ceiling loudspeaker, 60W, 6**

Ultra high performance 6-inch two-way ceiling mount loudspeaker system with concentric compression driver and integrated housing and mounting system (set of 2 pieces); white

Order number **LC20-PC60G6-6**

**Represented by:**

**Europe, Middle East, Africa:**  
 Bosch Security Systems B.V.  
 P.O. Box 80002  
 5600 JB Eindhoven, The Netherlands  
 Phone: + 31 40 2577 284  
 emea.securitysystems@bosch.com  
 emea.boschsecurity.com

**Germany:**  
 Bosch Sicherheitssysteme GmbH  
 Robert-Bosch-Ring 5  
 85630 Grasbrunn  
 Germany  
 www.boschsecurity.com

**North America:**  
 Bosch Security Systems, Inc.  
 130 Perinton Parkway  
 Fairport, New York, 14450, USA  
 Phone: +1 800 289 0096  
 Fax: +1 585 223 9180  
 onlinehelp@us.bosch.com  
 www.boschsecurity.us

**Asia-Pacific:**  
 Robert Bosch (SEA) Pte Ltd, Security Systems  
 11 Bishan Street 21  
 Singapore 573943  
 Phone: +65 6571 2808  
 Fax: +65 6571 2699  
 apr.securitysystems@bosch.com  
 www.boschsecurity.asia