

PVA-15CST Call stationPAVIRO



The PVA-15CST is a call station for the PAVIRO system.

As standard, the call station has a gooseneck microphone with pop shield and permanent monitoring, a total of 20 buttons, an illuminated LC display, and an integrated loudspeaker.


The call station can be modified to suit the user's requirements by connecting up to five PVA-20CSE call station extensions, each with 20 customizable selection buttons.

Other properties:

- Five menu/function keys (pre-programmed) one green or one yellow indicator light per button
- 15 selection buttons (customizable) two indicator lights (green/red) per button
- Numeric zone selection (can be activated during IRIS-Net configuration)
- Label with transparent covering the label can be changed at any time
- Can be used as a standing or desk/rack flushmounted device
- Internal monitoring with error logging complies with all relevant national and international standards
- Easy configuration use of the Configuration Wizard or IRIS-Net software


- ► Call station with soft touch button for PAVIRO system
- ▶ 15 freely programmable buttons
- ► Customization via built-in display and keys
- ► Provision for installing emergency button and key switch
- ► EN 54-16 system certification

System overview



- 1 Selection buttons
- 2 Button installation slots
- 3 Voice alarm indicator light
- 4 Combined fault warning indicator light
- 5 Power indicator light
- 6 Microphone
- 7 Loudspeaker

- 8 Display
- 9 ESC button
- 10 ↑ button
- 11 DEL button
- 12 ↓ button
- 13 ← button



- 1 EXT OUT port
- 2 CST BUS port
- 3 LINE port
- 4 MIC port

Certifications and approvals

Europe EN 54-16

Emergency standard compliance	
UK	BS 5839-8
Austria	ÖNORM F 3033

Environmental directive compliance		
Safety	EN 62368-1	
Immunity	EN 50130-4	

Environmental directive compliance		
Emissions	EN 61000-6-3 ICES-003 FCC-47 part 15B class A	
Environment	EN 50581	
Maritime	EN 60945	

Conformity	
Europe	CE/CPR
USA	FCC
Canada	ICES
Australia	RCM
Korea	KCC
Russian Federation	EAC
Environment	RoHS

Parts included

Quantity	Component
1	PVA-15CST
1	Patch cable (3 meters)
7	Blank paper strips
1	Strain relief (bracket)
2	Screws for strain relief
1	Cover release tool
1	Operation manual
1	Important safety instructions

Technical specifications

Electrical

CAN BUS port	10, 20, or 62.5 kbit/s, 1 RJ-45, max. length 1000 m
Maximum mic input level	-21 dBu
Maximum line input level	+4 dBu
Maximum NF output level	+12 dBu
Microphone:	

Nominal acoustic input level	• 85 dBSPL
Frequency response	• 250 Hz - 10 kHz (-6dB)
Signal to noise ratio	• > 60dB
Buttons	5 pre-programmed, 15 programmable zone/function keys
Indicator lights	Power (green), Fault (yellow), Alarm (red)
	Green or yellow LED per pre- programmed menu button
	Green and red LED per programmable zone/function key
LC display	Back-lit LC display (122 32 pixel)
Ports	1 CST BUS port (Control data + Audio + Power supply, RJ-45)
	1 audio source (line level, phone jack)
	1 microphone port (phone jack)
	1 EXT OUT port (call station extension, RJ-12)
DC power input	15-58 V

Maximum supply current (without call station extensions)	Standby/Idle/Announcement/Alert 24 V / 80 mA / 1.92 W
Maximum supply current (with 5 call station extensions)	Standby/Idle/Announcement/Alert 24 V / 190 mA / 4.56 W
Environmental	
Operating temperature	-5 °C to +45 °C (+23 °F to +113 °F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Humidity (non-condensing)	5% to 90%
Altitude	Up to 2000 m
Mechanical	
Dimensions (HxWxD)	166 mm x 200 mm x 66 mm (without microphone)
Weight (net)	0.6 kg
Mouting	Standalone; 19 in. rack
Color	Black

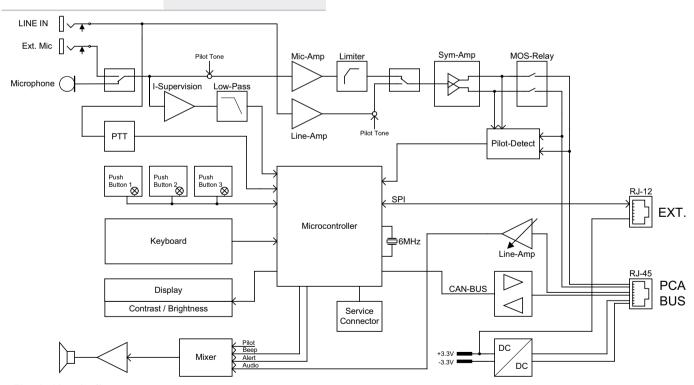


Fig. 1: Circuit diagram




Fig. 2: Dimensions of Call Station

Ordering information

PVA-15CST Call station

Call station for the PAVIRO system; has gooseneck microphone with pop shield and permanent monitoring. Order number **PVA-15CST | F.01U.298.720**

Accessories

PVA-20CSE Call station extension

Call station extension for the PAVIRO system; has 20 customizable selection buttons.

Order number PVA-20CSE | F.01U.298.723

PVA-1EB Call station emergency button

Optional emergency button that can be installed in the PVA-15CST Call station.

Order number PVA-1EB | F.01U.397.469 F.01U.312.985

PVA-1KS Call station key switch

Optional key switch that can be installed in the PVA-15CST Call station.

Order number PVA-1KS | F.01U.312.984

Services

EWE-CLSBAS-IW 12 mths wrty ext. Call Station basic

12 months warranty extension

Order number EWE-CLSBAS-IW | F.01U.360.680

Represented by:

Europe, Middle East, Africa: Bosch Security Systems B.V. P.O. Box 80002 5600 JB Eindhoven, The Netherlands Phone: + 31 40 2577 284 emea.securitysystems@bosch.com emea.boschsecurity.com

Asia-Pacific: Robert Bosch (SEA) Pte Ltd, Security Systems 11 Bishan Street 21 Singapore 573943 Phone: +65 6571 2808 Fax: +65 6571 2699 apr. security systems @bosch.com www.boschsecurity.asia